


## Combics DC, ED, FE weighing platforms



Design	Dimensions				
	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)
...DC -	320	240	72...90	264	184
...ED -	400	300	94...109	344	244
...FE -	500	400	96...111	443	343

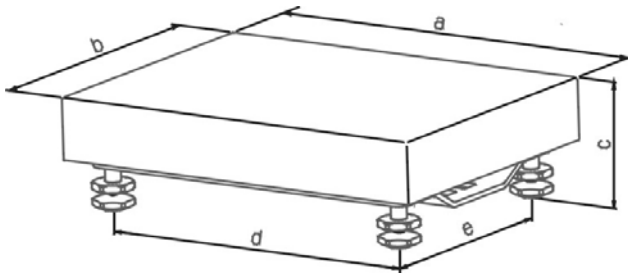

### 2 versions:

- : galvanized steel, IP65 protection
- : AISI 304 stainless steel, IP 67 / 68 protection  
(optional: electropolished AISI 316 Ti stainless steel)
- : Load plate in AISI 304 for both versions
- : 1 x Single Point load cell C 3
- : Overload protection
- : 4 adjustable feet, level indicator
- : Cable length: 3m
- : Operating temperature range -10°C...+40°C
- : Class III resolution for legal metrology (1 x 3,000e, 2 x 3,000e) or standard resolution (15,000d, 30,000d).


### Specifications:

Weighing capacity in kg	Order no. Version galvanized steel	Order no. Version AISI 304 stainless steel	Readability in g		verifiable		Overload capacity in kg
			non verifiable L	I	LCE	NCE	
3	CAPP1-3DC-	CAPS1-3DC-	0,2	0,1	1	0,5 / 1	50
6	CAPP1-6DC-	CAPS1-6DC-	0,5	0,2	2	1 / 2	50
15	CAPP1-15DC-	CAPS1-15DC-	1	0,5	5	2 / 5	50
30	CAPP1-30ED-	CAPS1-30ED-	2	1	10	5 / 10	130
	CAPP1-30FE-	CAPS1-30FE-	2	1	10	5 / 10	300
60	CAPP1-60ED-	CAPS1-60ED-	5	2	20	10 / 20	130
	CAPP1-60FE-	CAPS1-60FE-	5	2	20	10 / 20	300
150	CAPP1-150FE-	CAPS1-150FE-	10	5	50	20 / 50	300

## Packaging weights and dimensions

Code of dimensions	Platform size	Net weight in kg	Gross weight in kg	Volumina in dm <sup>3</sup>
DC	320 x 240 mm	6,4	7,9	47,88
FD	400 x 300 mm	11,5	13,3	70,56
FE	500 x 400 mm	21	24	113,26

## Preload, Operating limits:

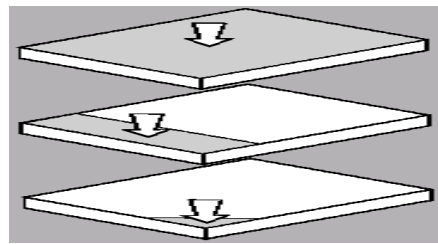

## Galvanized steel versions

Capacity	Dimension	Max. Preload	Max. overload center	Max. overload side	Max. overload corner
3 kg	320 x 240 mm	0 kg	50 kg	35 kg	20 kg
6 kg	320 x 240 mm	4 kg	50 kg	35 kg	20 kg
15 kg	320 x 240 mm	10 kg	50 kg	35 kg	20 kg
30 kg	400 x 300 mm	10 kg	130 kg	85 kg	45 kg
60 kg	400 x 300 mm	25 kg	130 kg	85 kg	45 kg
30 kg	500 x 400 mm	4 kg	300 kg	200 kg	100 kg
60 kg	500 x 400 mm	22 kg	300 kg	200 kg	100 kg
150 kg	500 x 400 mm	25 kg	300 kg	200 kg	100 kg

## Stainless steel versions

Capacity	Dimension	Max. Preload	Max. overload center	Max. overload side	Max. overload corner
3 kg	320 x 240 mm	1 kg	50 kg	35 kg	20 kg
6 kg	320 x 240 mm	5 kg	50 kg	35 kg	20 kg
15 kg	320 x 240 mm	10 kg	50 kg	35 kg	20 kg
30 kg	400 x 300 mm	10 kg	130 kg	85 kg	45 kg
60 kg	400 x 300 mm	25 kg	130 kg	85 kg	45 kg
30 kg	500 x 400 mm	5 kg	300 kg	200 kg	100 kg
60 kg	500 x 400 mm	22 kg	300 kg	200 kg	100 kg
150 kg	500 x 400 mm	25 kg	300 kg	200 kg	100 kg